


Installation Illustration

- A. Water: It needs two water-galvanized pipes. One is for cold water, another for hot. And they should be set on wall, 350mm above from ground,. And a device for cutting water should be set on wall.
- B. Power: The power should be 220V/50Hz, Single-phase, 10 Amp The socket should be waterproof, which is designed for bathroom and it should be placed above 350mm from ground.
- C. The waterspout, whose radius is within 0 to 400mm, should be set at the centre of the osculum. (According to the diagram).

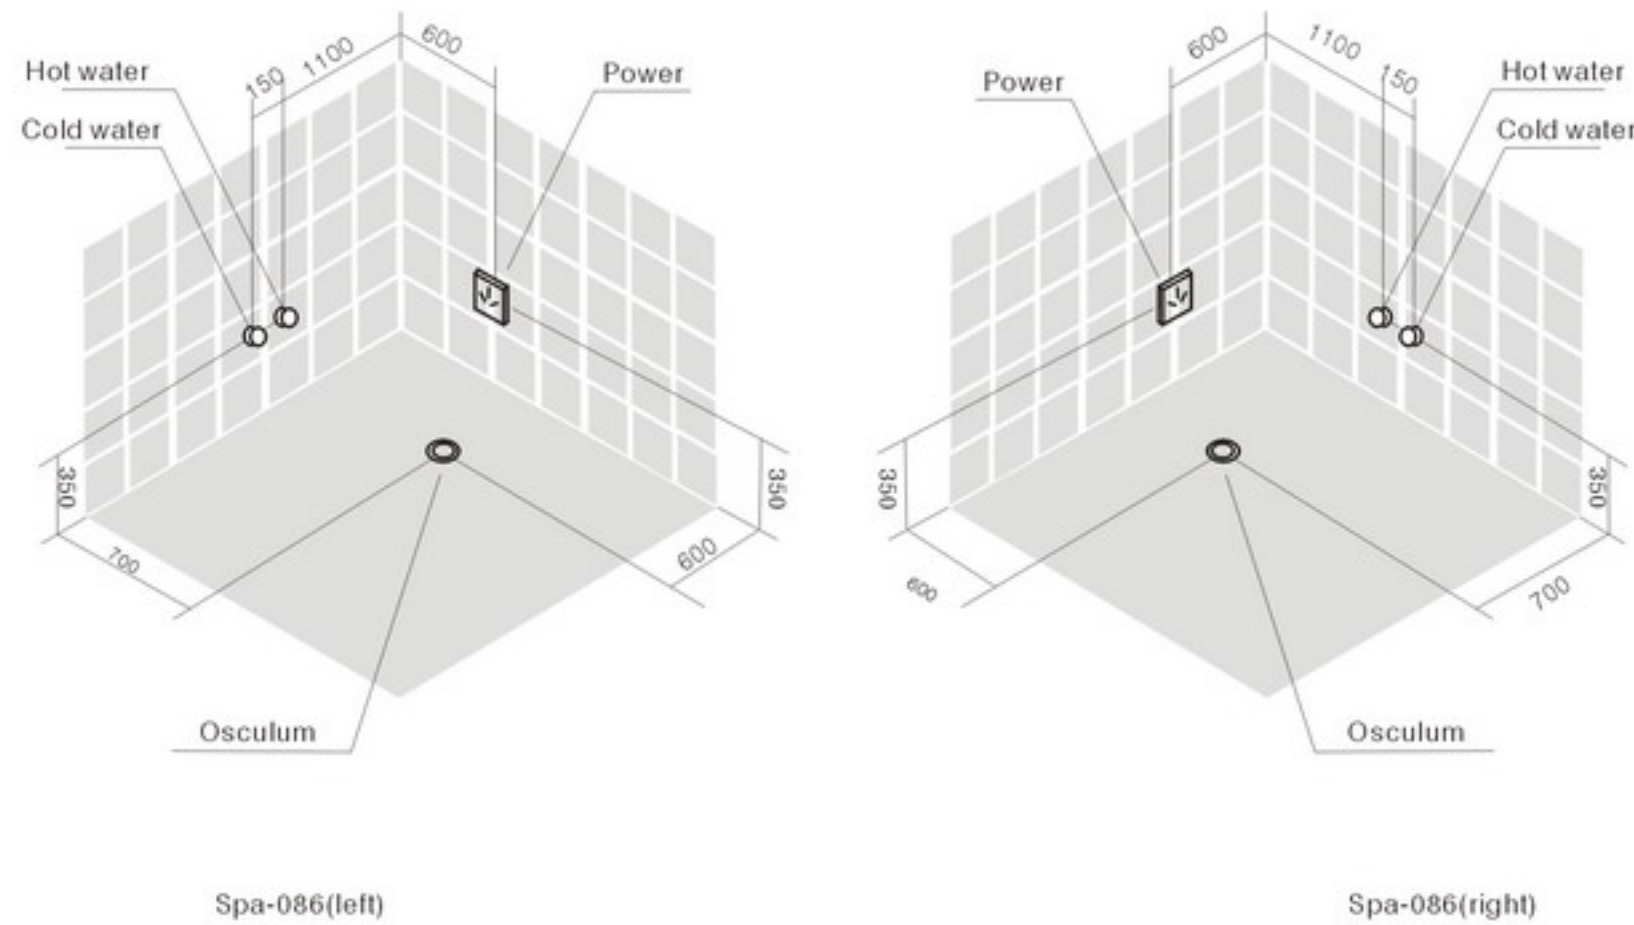

SIZE:1520X1520X760

- | | |
|-------------------------------|----------------------------|
| 1、 shower /faucet switch | 10 drain switch、 |
| 2、 water on-off | 11、 hydraulic pressure jet |
| 3、 shower | 12、 rail |
| 4、 faucet | 13、 Ozone |
| 5、 light | 14、 alveoli jet |
| 6、 Easy access control panels | 15、 water level detector |
| 7、 massage jet | 16、 towel rack |
| 8、 pillow | |
| 9. water return device | |

